

**No Skidding®**

266 Wildcat Rd, Toronto, ON M3J 2N5 Canada  
 Phone: (416) 667-1788 Fax: (416) 667-1783  
 sales@noskidding.com www.noskidding.com  
 or call us Toll Free at 1-800-375-0571

We warehouse within the U.S. for our U.S. customers



# PHOTOLUMINESCENT SAFETY ID GRIT TAPE NS4300PH

## No Skidding Premium Tape S4300PH Anti Slip Photoluminescent Grit

### DESCRIPTION

No Skidding Premium Anti Slip Photoluminescent Grit Tape is a safety grade photo luminescent non-skid grit tape coated with an aggressive pressure sensitive adhesive. It has been designed to exceed requirements for OSHA and other safety standards.


### APPLICATIONS

No Skidding Anti Slip Photoluminescent Grit Tape is designed for indoor and safety applications such as egress markings in building, marine, rail, and a military applications.

### SIZES

Sizes: 1", 2", 3", 4", 6", 12", 18", 24" X 60 ft. Also 6"X24" and 3 inch Arrows or 3 inch Circles. We can customize cleat sizes per your specifications.

### PROPERTIES

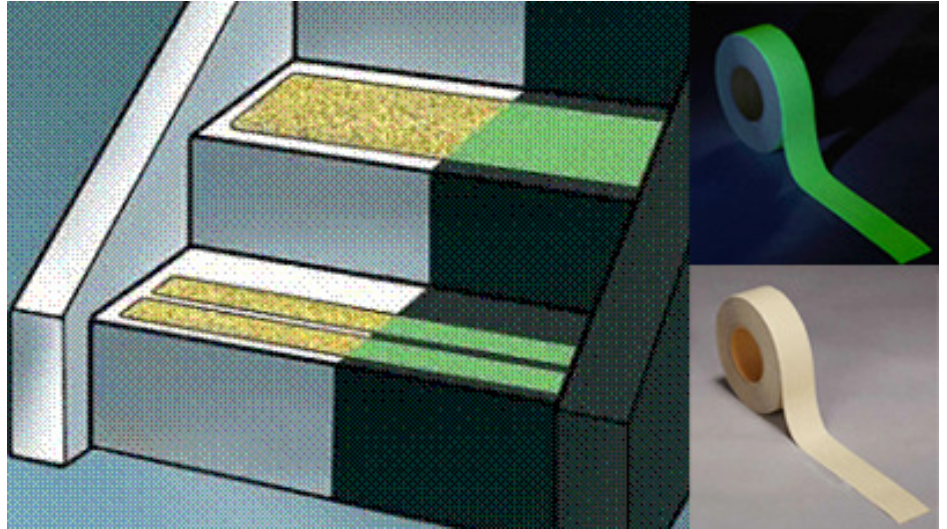

PHYSICAL PROPERTIES	TEST METHODS	TYPICAL RESULTS
Thickness	PSTC – 133 - Substrate - Pressure Sensitive adhesive - Release Liner	0.019 inch (0.483 mm) 0.002 inch (0.051 mm) 0.007 inch (0.178 mm)
Peel Adhesion To:	PSTC – 101	
- Stainless Steel	15 minute dwell 24 hour dwell	90 oz/in (99 N/100 mm) 110 oz/in (120 N/100 mm)
- Powder Coated surfaces*	15 minute dwell 24 hour dwell	80 oz/in (88 N/100 mm) 85 oz/in (93 N/100 mm)
- Polyethylene	15 minute dwell 24 hour dwell	55 oz/in (60 N/100 mm) 65 oz/in (71 N/100 mm)
Shear Adhesion To:	PSTC – 107	
- Stainless Steel	½" x ½" x 1000g	10 Hours
Tack	PSTC – 6 Rolling Ball Tack	<3 inches
Luminous Values	DIN 67510 / ASTM 2072 (Xe lamp 1000Lx / 5 min) 10 min (Xe lamp 1000Lx / 5 min) 60 min	56 mcd/m <sup>2</sup> 7 mcd/m <sup>2</sup>
Coefficient of Friction	ASTM D1894	

**PROPERTIES (continued)**

PHYSICAL PROPERTIES	TEST METHODS	TYPICAL RESULTS
(Kinetic)	- Dry Rubber - Wet Rubber - Dry Leather - Wet Leather	0.9 0.9 0.8 1.3
Service Temperature		
- High	14 days at 220°F	No Visible Effects
- Low	14 days at -20°F	No Visible Effect

CHEMICAL PROPERTIES	REAGENT	RECOMMENDATIONS
Solvent Resistance (Product laminated to stainless steel panel and allowed to condition for 24 hrs at room temperature before testing. Sample was covered with reagent to the point that edges of product are also exposed to the reagent. This product is exposed to reagent for 1 hour at room temperature then reagent is removed and product is immediately tested for scrape resistances, delaminating and other visual effects.)	Water 10% Salt Water Bleach Trichloroethylene 25% Sulfuric Acid 1% Sodium Hydroxide Unleaded Gasoline Diesel Fuel Hydraulic Fluid 50% Antifreeze in water MEK Mineral Spirits 99% IPA	Recommended Recommended Recommended Not Recommended Intermittent Contact Only Intermittent Contact Only Intermittent Contact Only Recommended Recommended Recommended Not Recommended Recommended Recommended

- *Color and lot variances of coated surfaces including paints, powder coatings, lacquers, stains and other treatments may vary the performance of the tape and should be evaluated for the compatibility of the tape to the specific surface.*

**Note:** While the data contained herein is believed to be reliable averages of the products properties, the data should not be used for specification purposes. Test Data and results contained in this document are for general guidance only and should not be used by customers to establish designs and specifications. Customers who desire performance data should contact No Skidding Products for further recommendations.

**WARRANTY**

The determination of the suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy or suitability of information in this document to any specific application. No Skidding warrants its products to be free from defects but limits its obligation to replacement of products that has been proven, to No Skidding's satisfaction, to be defective. This warranty is non-transferable and only applied to customers buying directly from No Skidding Products. No Skidding is not liable for any loss, damage, expenses, or consequential damages arising in connection with the use of this product

**PLEASE READ AND FULLY UNDERSTAND LABEL AND MSDS BEFORE USING.**

**Important:** Seller's and manufacturers only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for the intended use, and the user assumes all risk and liability whatsoever in connection therewith. No statement of recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of the seller and manufacturer. Buyer assumes all risk and liability associated with disposal.

**No Skidding products are in use around the world in hotels, warehouses, factories, shopping malls, public transit systems, airports, hospitals and senior care, office complexes, restaurants, day care, schools, fitness clubs, government and military facilities.**

**The most complete range of slip injury prevention products in the World.**



266 Wildcat Rd, Toronto, ON M3J 2N5 Canada  
 Phone: (416) 667-1788 Fax: (416) 667-1783  
 sales@noskidding.com www.noskidding.com  
 or call us Toll Free at 1-800-375-0571

**We warehouse within the U.S. for our U.S. customers**  
 \* No Skidding® is a registered trademark of No Skidding Products, Inc., Toronto Canada